

Overview


These vacuum cleaners are suitable to pick up dust and small deposits. It is not suitable for liquid suction. They are sturdy and powerful, simple to use with its tool kit. It is suitable for collective use, for example: hotels, schools, hospitals, factories, offices, shops etc. The equipment is HIGH HAZARD. They are used to separate all dust with all limit values of occupational exposure including carcinogenic and pathogenic.



Exclusive Features

- ▶ STRONG HOOKS
- ▶ MICROFIBER BAG
- ▶ H CLASS CERTIFIED
- ▶ INNOVATIVE GASKET
- ▶ HEPA H14 CARTRIDGE
- ▶ MULTISTAGE FILTRATION
- ▶ SCREWING CONNECTION
- ▶ SAFETY DISPOSAL SYSTEMS
- ▶ FILTER OVER PRESSURE INDICATORS
- ▶ RESISTANT FRAMEWORK AND INLET PLUG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ INDEPENDENT MOTORS

Most Frequently Used

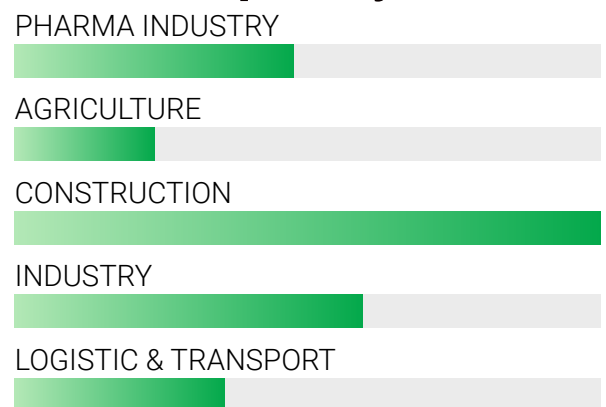

TECHNICAL DATA	GS 2/62 H
Usage	Dry
Motor	2
Power	2000-2400W max
Voltage	220-240V
Water Lift	2470mmH2O
Airflow	420m3/h
Tank Capacity/Material	62l / Steel
Cable Length	8,5m
Filtering Surface	12,000cm2
Sound Pressure Level	74dB[A]
Diameter of Accessories	38mm
Dimensions (LxWxH)	550x600x960mm
Weight	21,0kg

POWER MAX

2400
W

WATER LIFT

2470
mmH2O

AIRFLOW

420
m3/h

TANK CAPACITY

62
l